



CORPORATE OFFICE:
9723 Teichman Road • Galveston, Texas 77554
Phone: 409-744-1222 • Fax: 409-744-5218

HOT TAP SYSTEM

TT-HT12

HOT TAP

POWER: HYDRAULIC DRIVEN
FLOW/PRESSURE: 7 GPM @ 2,000 PSI
STROKE: 18"
MANUAL CONTROL AT HOT TAP
CAPABLE OF UP TO 12" DIAMETER HOLE

HPU

POWER: DIESEL DRIVEN
FLOW/PRESSURE: 7 GPM @ 2,000 PSI
WEIGHT: 750 POUNDS

MAGNETIC DRILL

POWER: HYDRAULIC DRIVEN
FLOW/PRESSURE: 7 GPM @ 2,000 PSI
USED TO MOUNT FLANGES

FLANGES

MADE TO ORDER
DEPENDING ON
SIZE OF HOLE AND
MOUNTING
SURFACE.

PUMPS

VARIES DEPENDING
ON PRODUCT AND
DISCHARGE NEEDED




HYDRAULIC PUMP FITTED TO FLANGE




2.5" BIT WITH PILOT BIT



HOT TAP FITTED TO 3" FLANGE

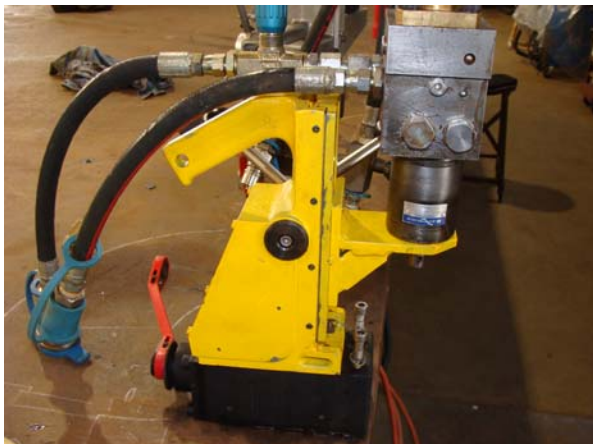

MAGNETIC DRILL

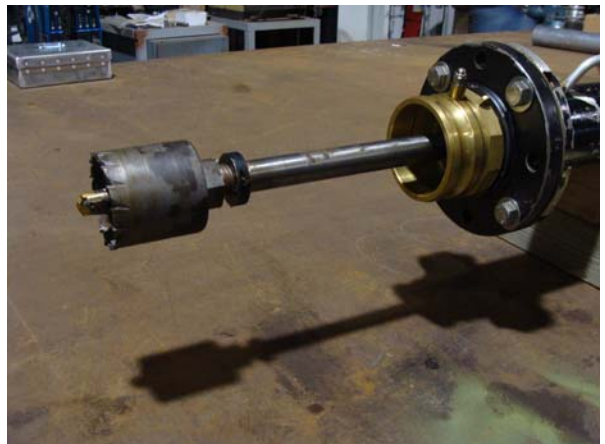

STROKE ON HOT TAP